




## VI-22301

### Industrial PoE Splitter

- Small dimensions
- Delivers PoE+ and separately DC voltage
- Output voltage 12 or 24VDC selectable
- Extended temperature range -40 to 75°C
- Maximum output power 60W

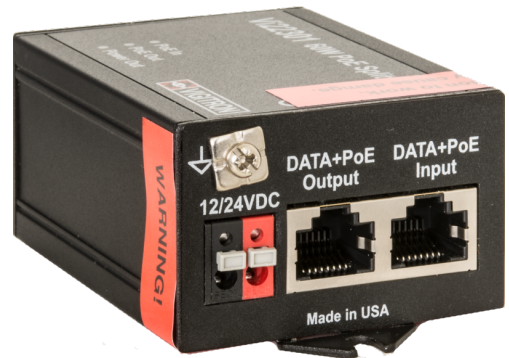

This industrial PoE splitter allows an IP data interface with PoE+ as well as a separate DC voltage of 12 or 24VDC. For example, in addition to a PoE-powered IP camera, a separate light source or heater can be powered. Due to the small dimensions and the wide range of operating temperature, the device is especially suitable for installation in outdoor locations.



## Technical data

---

### General properties

supply voltage	PoE+ / PoE++ (PD), max. 60W
power consumption	Max. 60W
MTBF	
operating temperature	-40° to +75°C
dimensions	74 x 54 x 35mm (LxWxH)
weight	0,15kg

### interfaces

copper ports	1 x 10/100/1000TX, RJ45, Data & PoE IN (PD), max. 60W 1 x 10/100/1000TX, RJ45, Data & PoE OUT (PSE), max. 30W 1 x DC screw clamps 12/24VDC, max. 30W
--------------	--

### network properties

PoE Management	
standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE 802.3af for POE IEEE 802.3at for POE+

## Product variants

---

*Version 09.04.2020, Changes without notice*